

ES4046

ELECTRIC SCISSOR LIFT

SCISSOR LIFT



Performance

Platform Height Elevated	Indoor	11.90 m
	Outdoor	9.00 m
Platform Capacity		320 kg
Capacity on Platform Extension		115 kg
Occupants (Indoor/ Outdoor)		3 /1
Lift/Lower Time (Rated Load)		76 /42 Seconds
Maximum Drive Height	Indoor	Full Height (11.90 m)
	Outdoor	9.00 m
Weight*		3,215 kg
Ground Bearing Pressure		10.7 kg/cm ²
Drive Speed–Elevated		0.8 km/h
Drive Speed–Lowered		4.8 km/h
Gradeability		25%
Turning Radius (Inside)		Zero
Turning Radius (Outside)		2.39 m

* Certain options or country standards will increase weight

Standard Specifications

Power Source

Batteries	4 x 6V 260 amp-hr AGM
Charger	27 amp
Drive	24V AC Electric Front Wheel

Tyres

- Tyre Size/Type (Non-Marking) 406 x 125 mm

Brakes

- Electric / Multi-Disc Friction

Hydraulic System

• Capacity	12 L
• Pump	Fixed Displacement Gear

Standard Features

- Clearsky Smart Fleet Hardware
- Proportional Controls
- Load Sensing System
- Electric Drive
- Smart Battery Charger CAN Enabled
- Battery Condition Indicator
- All Motion Alarm
- Horn
- Hourmeter
- Tilt Alarm and Light
- Lanyard Attach Points
- Moveable, Removable Platform Control
- Lubrication Free Scissor Arm Bushings
- Scissor Maintenance Prop
- Active Pothole Protection System
- Lifting and Tie Down Points
- Fork Lift Pockets
- Foot-Actuated Deck Extension
- Steel Swing-Out Doors
- Variable Tilt Visual Zone Indicator
- Manual Descent Cable
- Diamond Tread Steel Deck
- Greaseless Kingpin Joints
- Analyzer Port for Diagnostics
- Dynamic Braking
- Flashing Amber Beacon
- Self Closing, Self Latching Gate
- Fold Down Rails
- USB Charger and phone Holster
- MDI (Ground)
- AS/NZS 1418.10 Compliance



Accessories & Options

- Fire Extinguisher
- Anti-Vandalism Package for Ground Controls and Platform Controls
- Ambient Noise (Squawker) Alarm
- AC Outlet To Platform incl. ELCB
- SkySense Enhanced Detection System
- Pipe Racks
- Panel Carrier

ES4046



ELECTRIC SCISSOR LIFT

SCISSOR LIFT



Dimensions

All dimensions are approximate.

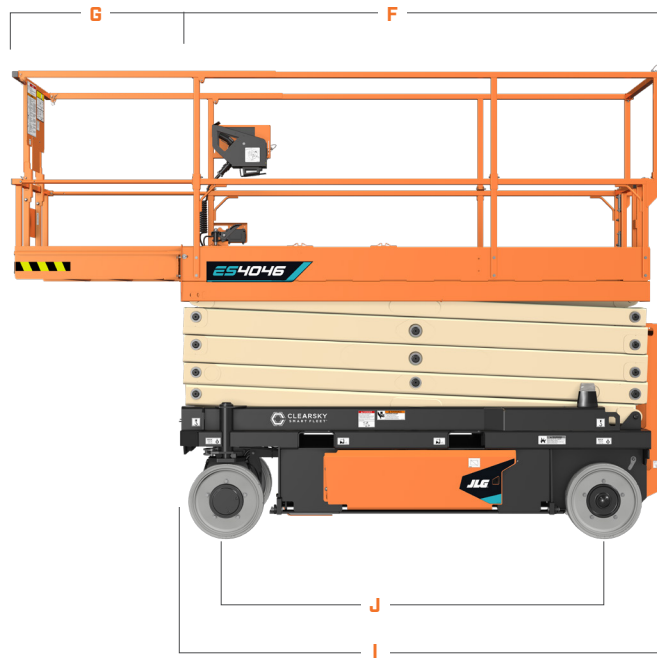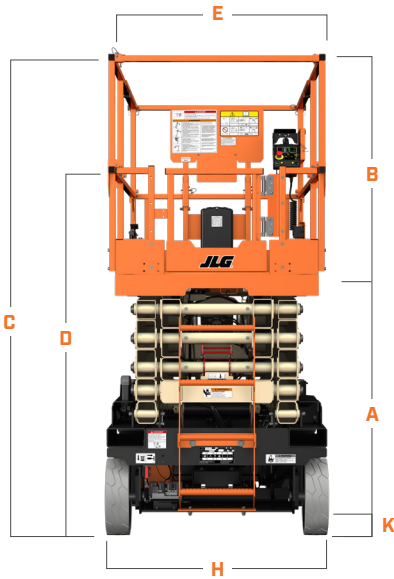

A. Platform Height (Lowered)	1.4 m
B. Platform Railing Height	1.13 m
C. Machine Height (Rails Raised)	2.53 m
D. Machine Height (Rails Lowered)	1.99 m
E. Platform Width	1.16 m
F. Platform Length	2.62 m
G. Platform Extension	0.91 m

H. Machine Width	1.17 m
I. Machine Length	2.70 m
J. Wheelbase	2.04 m
K. Ground Clearance	0.12 m



The JLG "2 & 5" Warranty

JLG Industries, Inc. backs its products with its exclusive "2 & 5" Warranty. We provide coverage on all products for one (2) full year and cover all specified major structural components for five (5) years. Due to continuous product improvements, we reserve the right to make specification and/ or equipment changes without prior notification. This machine meets or exceeds AS/NZS 1418.10 2011 as originally manufactured for intended applications.

R0424

JLG Industries (Australia)
358 Park Road
Regents Park, NSW 2143
Telephone 02 8718 6300
Fax 02 8718 6377
www.jlg.com.au

An Oshkosh Corporation Company